RoHS COMPLIANT

1 OF 1

REV.	REVISION	DATE

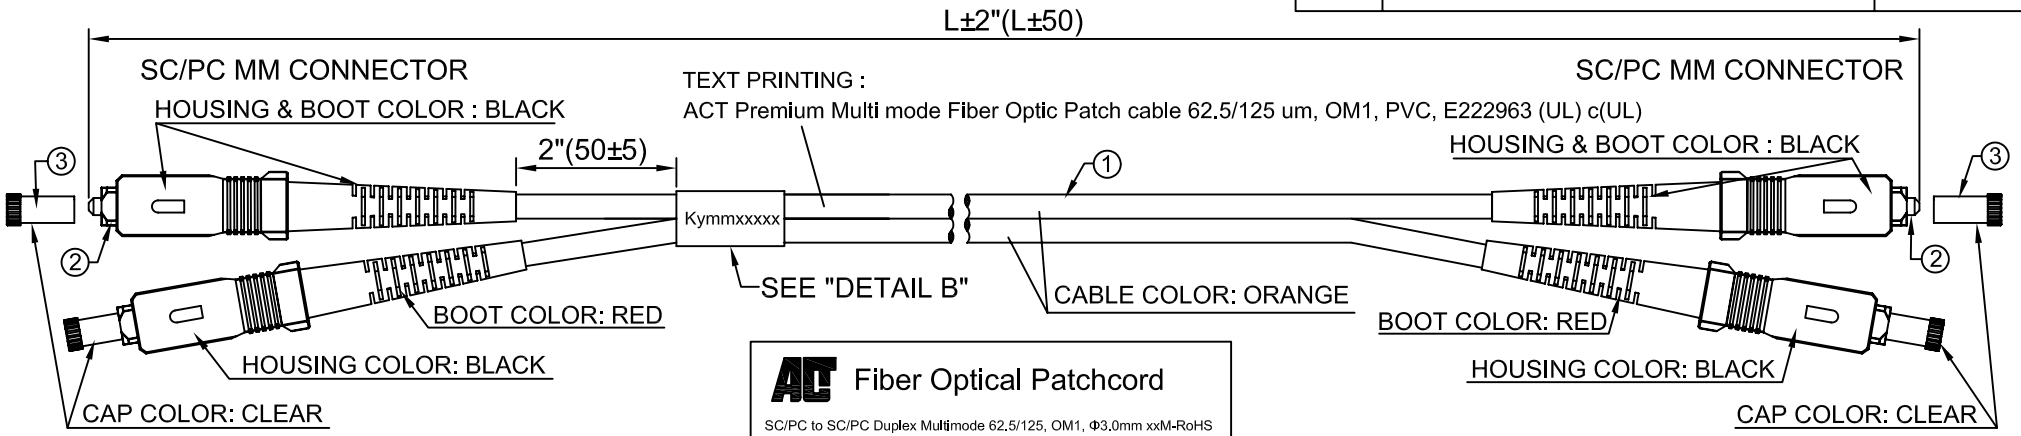

NOTE:
1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

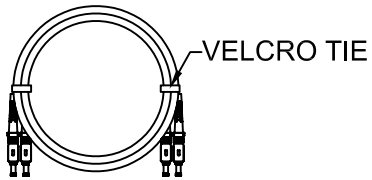

DETAIL A

SEE TABLE "DESCRIPTION 1"

Fiber Optical Patchcord

SC/PC to SC/PC Duplex Multimode 62.5/125, OM1, Φ3.0mm xxM-RoHS

Model: xxxxx -xxxxxx

Lot number:

PO/NO:

x x x x x x x x x x x x x

SEE TABLE "DESCRIPTION 2"

Performance: (@23℃) λ=850/1310±20nm

Serial No		Insertion Loss ≤ 0.3dB	
		850nm	1310nm
Kymmxxxxx	A		
	B		
	C		
	D		

Prepared By:_____ Date:_____

DETAIL C



DETAIL B

y: Year; mm: Month
xxxxx: Serial Number

RL3050	50	50	164'(50000)	442250-RL3050	8716065223798
RL3020	20	20	65.6'(20000)	442220-RL3020	8716065223781
RL3015	15	15	49.2'(15000)	442215-RL3015	8716065223774
RL3010	10	10	32.8'(10000)	442210-RL3010	8716065223767
RL3005	05	5	16.4'(5000)	442205-RL3005	8716065170856
RL3003	03	3	9.84'(3000)	442203-RL3003	8716065170849
RL3002	02	2	6.56'(2000)	442202-RL3002	8716065170832
RL3051	51	1.5	4.92'(1500)	4422015-RL3051	8716065223863
RL3001	01	1	3.28'(1000)	442201-RL3001	8716065170825
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL: DATE:

ITEM	Q'TY	PART NO.	DESCRIPTION
3	4PCS		SC DUST COVER, CLEAR.
2	4SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 62.5/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.

PART LIST

UNIT: Inches[mm]		TITLE: PATCHCORD SC-SC MULTIMODE DUPLEX 62.5/125, OM1, 3.0mm, ORANGE.	
DRAWN BY: Catherine	DATE: 2007/10/4	CUSTOMER	CUSTOMER PART NO.: RL30**
CHECKED BY	DATE	DRAWING NO.: PK709006	Ref. NO. / REV.: A
APPROVED BY	DATE		
SALE BY	DATE	TRENDEX PART NO.	